


Piezo Ceramic Speakers

Model KSN 1001D Super Horn (White)

The original super horns, with sound pressure levels of 94 dB @ 1m/1W, set the standard for piezo speakers. A smooth response from 4 kHz to 20 kHz makes them ideal for sound reinforcement and high-fidelity applications.




KSN 1001D

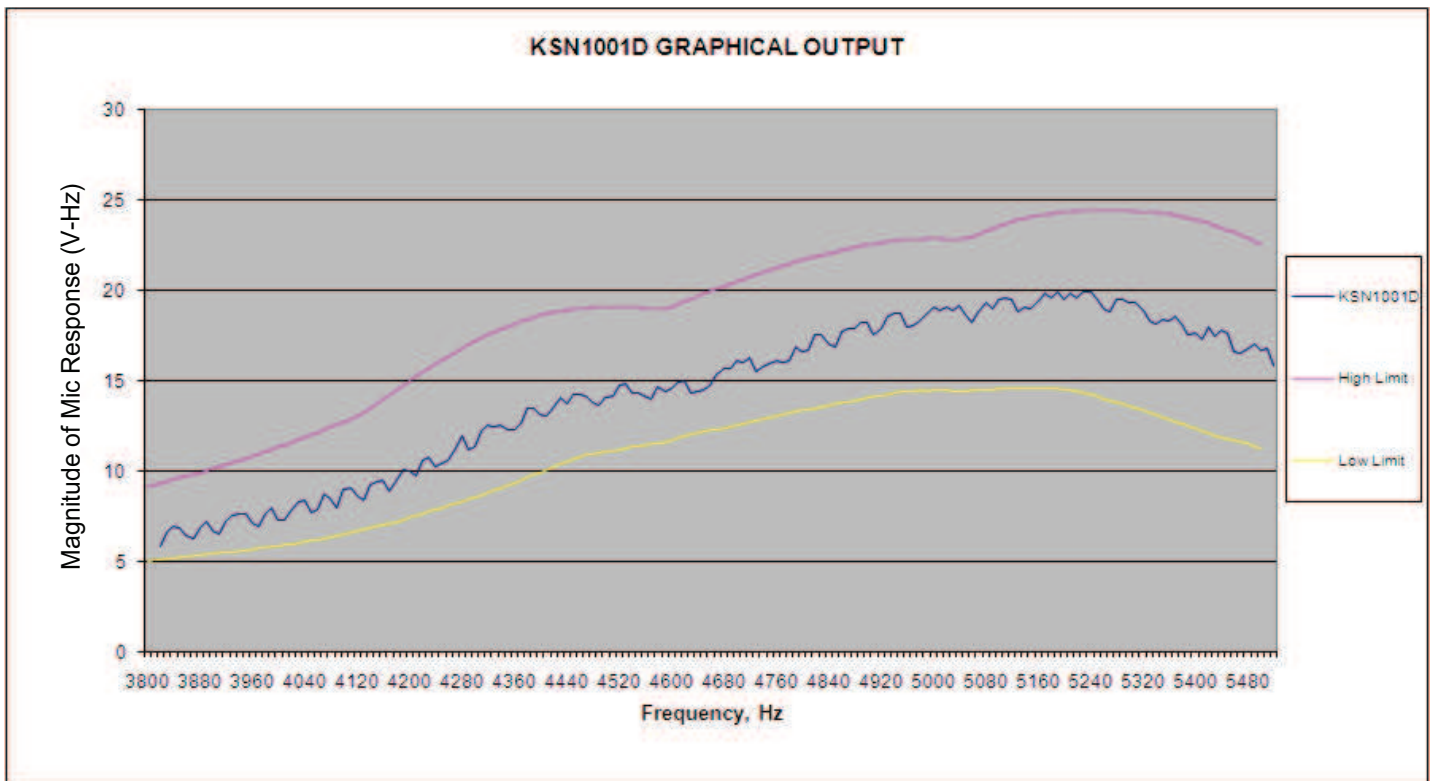

www.piezosource.com

250 East Gish Rd
San Jose, CA 95112
Phone: 408-487-1700
Fax: 408-487-1707
Email: sales@piezosource.com



Piezo Ceramic Speakers

KSN 1001D Specifications

Frequency Response: 4 kHz to 27 kHz

Average Sensitivity: 94 dB at 2.83v


Maximum Power Handling Capacity: 75 W (EIA RS426)
(8 Ω system reference)

Maximum Voltage: 15 V rms continuous
35 V rms intermittent

Maximum Temperature: 80°C

Typical Impedance: Appears as a 01.3 μF capacitor

KSN 1001D Dimension

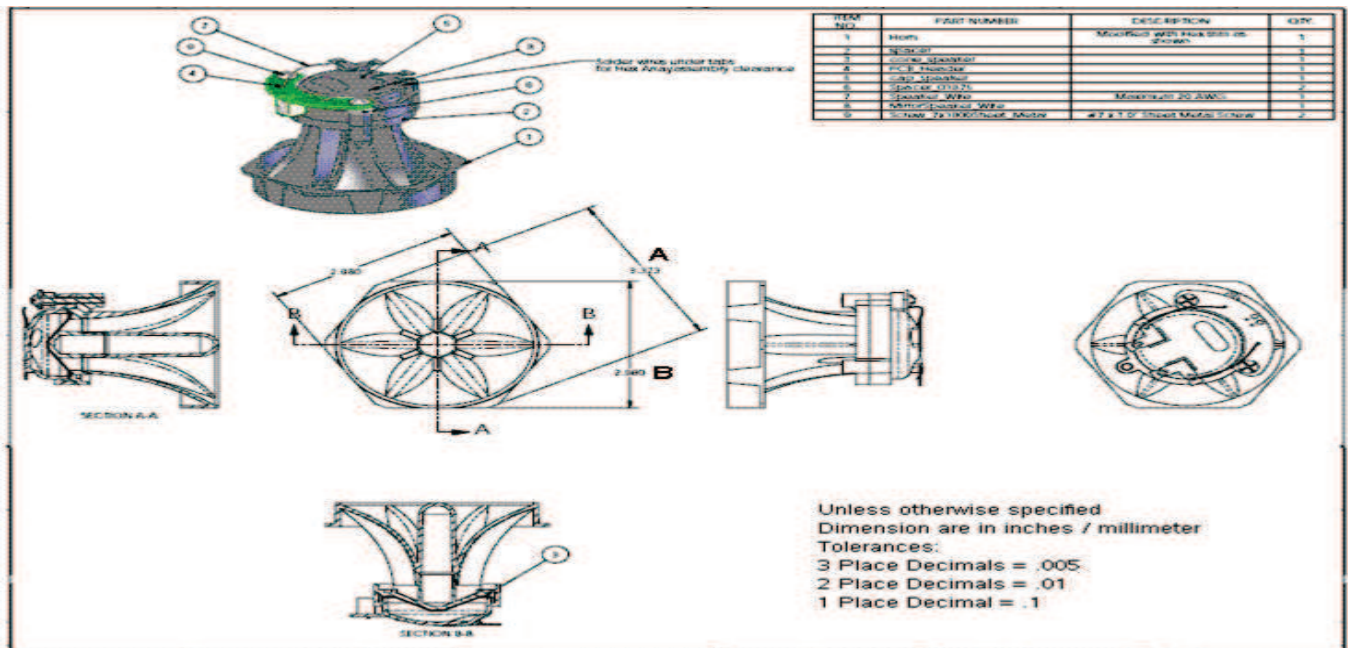

www.piezosource.com

250 East Gish Rd
San Jose, CA 95112
Phone: 408-487-1700
Fax: 408-487-1707
Email: sales@piezosource.com